

Fitvalf Streamer 2010



Product Details



The Streamer Pumps are precision, injection - moulded units, using a temperature and corrosion resistant fibre glass low dense plastic. The difference between Streamer 2010 and other pumps lies in their uncomparable performance.

Characteristics

Monoblock pump body, in 30% fiberglasspolypropylene for protection againsts corrosivewater. Housed inside is a PREFILTERING BASKET in TWO PARTS that has a large filtering surfaceand is easy to remove and to clean. High quality steel shaft and mechanical seal. Noryl ultrasound soldered impeller.

Motor

IP55 protected. 230V or 230/400V - 50Hz. 2850 rpm.

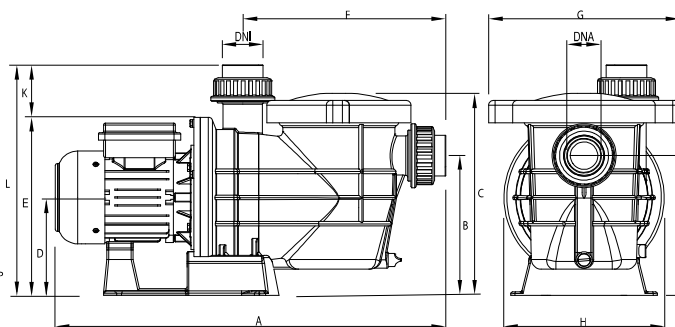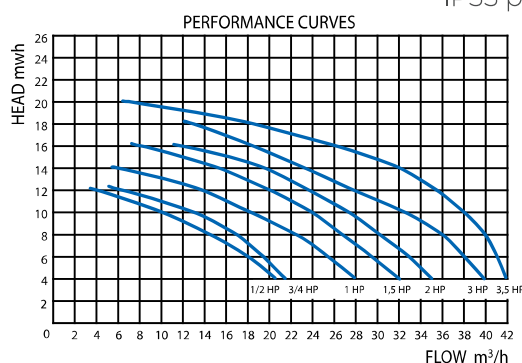

Pump Type	HP	CON- DAN- SATOR (µF)	AMPERES			HEAD mwh								
			II	III		4	6	8	10	12	14	16	18	20
			230V	230V	400V									
			DISCHARGE m³/h											
STRN-50M/T	0,50	16	2,73	-	-	20,50	18,00	14,30	10,00	4,00	-	-	-	-
STRN-75M/T	0,75	20	3,88	2,33	1,35	21,70	19,50	17,00	13,00	6,00	-	-	-	-
STRN-100M/T	1,00	25	5,15	3,03	1,75	28,00	25,70	22,50	18,00	13,90	6,00	-	-	-
STRN-150M/T	1,50	30	7,02	4,42	2,55	32,00	29,70	26,50	24,00	20,00	15,50	8,00	-	-
STRN-200M/T	2,00	40	8,60	5,50	3,50	35,00	33,00	30,00	27,50	23,80	19,50	12,00	-	-
STRN-300M/T	3,00	40	9,80	6,01	3,90	40,00	38,00	36,00	32,40	27,60	23,20	18,50	13,00	-
STRN-350M/T	3,50	60	13,67	8,61	4,98	42,00	41,00	40,00	38,00	35,50	32,00	26,40	18,50	7,10

Pump Type	DNA	DNI	DIMENSION (mm)										Net Weight(kg)		Packing W. (kg)	
			A	K	B	C	D	E	F	G	H	L	Mo.	Tri.	Mo.	Tri.
STRN-50M/T	1 ½"	1 ½"	610	80	205	310	145	275	320	292	245	355	10,290	-	11,514	-
STRN-75M/T	2"	1 ½"	610	80	205	310	145	275	320	292	245	355	11,234	-	12,484	-
STRN-100M/T	2"	1 ½"	610	80	205	310	145	275	320	292	245	355	12,360	11,000	13,609	12,244
STRN-150M/T	2"	2"	630	80	205	310	145	275	320	292	245	355	15,095	14,420	16,344	15,669
STRN-200M/T	2"	2"	630	80	205	310	145	275	320	292	245	355	17,150	16,280	17,534	18,404
STRN-300M/T	2"	2"	630	80	205	310	145	275	320	292	245	355	17,150	16,280	17,534	18,404
STRN-350M/T	2"	2"	670	80	205	310	145	275	320	292	245	355	20,450	19,130	20,384	21,704

Pump Type	STRN-50T/M	STRN-75T/M	STRN-100T/M	STRN-150T/M	STRN-200T/M	STRN-300T/M	STRN-350T/M
Ø SUCTION PIPE	1 ½"(Ø50mm)	2"(Ø63mm)	2"(Ø63mm)	2 ½"(Ø75mm)	3"(Ø90mm)	3"(Ø90mm)	4"(Ø110mm)

Description	Code	Pieces	Weight (kg)	Volume(m³)
STRN-50M 1/2 HP, Monophase	0111STRN50M	1	11.514	0.051
STRN-80M 3/4 HP, Monophase	0111STRN75M	1	12.484	0.051
STRN-80T 3/4 HP, Triphase	0111STRN75T	1	11.754	0.051
STRN-100M 1 HP, Monophase	0111STRN100M	1	13.609	0.051
STRN-100T 1 HP, Triphase	0111STRN100T	1	12.244	0.051
STRN-150M 1,5 HP, Monophase	0111STRN150M	1	16.344	0.051
STRN-150T 1,5 HP, Triphase	0111STRN150T	1	15.669	0.051
STRN-200M 2,0 HP, Monophase	0111STRN200M	1	18.404	0.051
STRN-200T 2,0 HP, Triphase	0111STRN200T	1	17.534	0.051
STRN-300M 3,0 HP, Monophase	0111STRN300M	1	18.404	0.051
STRN-300T 3,0 HP, Triphase	0111STRN300T	1	17.534	0.051
STRN-350M 3,5 HP, Monophase	0111STRN350M	1	21.704	0.054
STRN-350T 3,5 HP, Triphase	0111STRN350T	1	20.384	0.054